


## Thermoplastic Polyurethane (TPU, C-HPU-FDA)

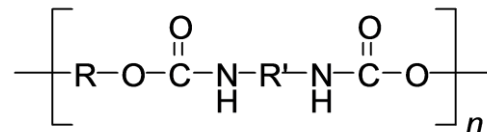

### SPECIFICATIONS

Property	Spec	Value
Hardness	ISO 868	96A ±2
Hardness	ISO 868	50 ±3
Specific Gravity (kg/m <sup>3</sup> )	ISO 1183	1130
Tensile Strength (MPa)	DIN 53504	45
Ultimate Elongation	DIN 53504	450%
100% Modulus (N/mm <sup>2</sup> )	DIN 53504	12
300% Modulus (N/mm <sup>2</sup> )	DIN 53504	22
Tear Strength (kN/m)	DIN ISO 34-1 (B)	80
Abrasion (mm <sup>3</sup> )	DIN 53516	20
Compression Set 70C 24hrs @ 25% deflection	ISO 815	30%
Compression Set 100C 24hrs @ 25% deflection	ISO 815	35%
Minimum Service Temp.		-37° C
Maximum Service Temp.		110° C
Color		Red

### DESCRIPTION

MP87 is a TPU material with hardness 96 Shore A and 50D, specially compounded for food use applications. The polyurethane polymer industry has enormous categories of products for a wide variety of applications. Polyurethane used in the seal industry is a thermoplastic elastomer (TPU). As the name suggests, it behaves like an elastomer but the chemistry is of a thermoplastic. The elasticity of a TPU is brought about through polymer morphology phase changes as in thermoplastics not through vulcanization as seen in other elastomers. Because of its thermoplastic nature, TPU has excellent tensile strength and abrasion resistance that other elastomers are unable to match. Meanwhile, TPUs also have good flexibility and shock absorbing performance. An additional advantage of TPUs is that they can be molded using conventional thermoplastic processes.